


## PRESERV A - 125 WN1

'PRESERV A - 125 WN1' is a Non - Fluoro based UV and weather stable white Backsheet, designed uniquely to have thermally integrated inseparable layers of PET along with a high bonding primer layer. This Backsheet has an improved resistance to scratch and delamination. PRESERV A - 125 WN1 can be used for all Crystalline PV modules.

### STRUCTURE

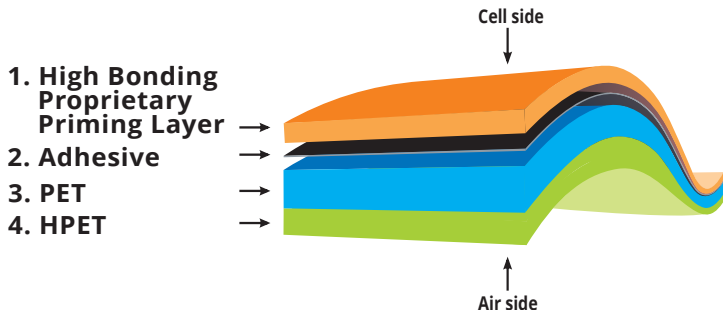

## PROPERTIES

Particulars	Test Method	Unit	Description	Values
Thickness	Micrometre	$\mu\text{m}$		$300 \pm 5\%$
Width	Scale	mm		Up to 1250
Tensile Strength @ max load	ASTM D 882	Mpa	MD TD	$\geq 100$ $\geq 100$
Elongation @ break	ASTM D 882	%	MD TD	$\geq 100$ $\geq 90$
Thermal Shrinkage @ 150°C, 30 min.	ASTM D 1204	%	MD TD	$\leq 1.5$ $\leq 0.5$
Interlayer Adhesion Strength	ASTM D 903	N/cm	PET/PRIMER	$\geq 5$
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	Backsheet / EVA	$\geq 70$
Moisture Barrier- MVTR @ 38°C, 90% RH	ASTM F 1249	$\text{g}/(\text{m}^2\text{-day})$		$\leq 2.0$
System Voltage @ 150 $\mu\text{m}$ DTI	IEC 62788	VDC		$\geq 1000$
Comparative Tracking Index (CTI)	IEC 60112	V		600

Width: Up to 1000 mm - all sizes available. Sizes >1000 mm - make to order

**PACKING:** Unless specified, below is the standard packing of 'PRESERV'  
# Length / Roll : 100 metres | # No. of Rolls/Pallet: 16  
# Total Linear Metres/Pallet : 1600  
# Each roll is sealed in a protective bag

**Note :** The above technical information represents the typical range of properties and is believed to be correct as on date. This data should however not be used to establish specification limits or used as basis for design. RenewSys gives no warranty and assumes no liability in connection with any use of this information and is subject to the RenewSys general terms and conditions.