


PRESERV 1 - 350 WD

'PRESERV 1 - 350 WD' is a Fluoro, UV stable, weather resistant, extra thick white Backsheet designed for 1500 VDC system voltage PV modules. The cell side priming layer ensures UV resistance and high bond with EVA. This Backsheet can be used for all Crystalline and many Thin-Film PV modules.

STRUCTURE

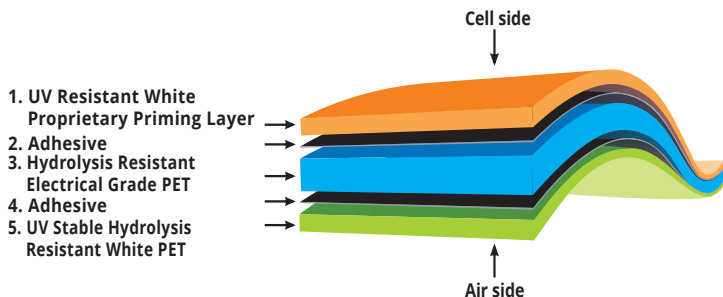

PROPERTIES

Particulars	Test Method	Unit	Description	Values
Thickness	Micrometre	μm		490 ± 7%
Width	Scale	mm		Up to 1250
Tensile Strength @ max load	ASTM D 882	Mpa	MD TD	≥ 100 ≥ 100
Elongation @ break	ASTM D 882	%	MD TD	≥ 90 ≥ 90
Heat Shrinkage @ 150°C, 30 min.	ASTM D 1204	%	MD TD	≤ 1.5 ≤ 0.5
Interlayer Adhesion Strength	ASTM D 903	N/cm	PVDF/PET PET/PRIMER	≥ 5 ≥ 5
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	Backsheet / EVA	≥ 100
Moisture Barrier - MVTR @ 38°C, 90%RH	ASTM F 1249	g/(m ² -day)		≤ 1.6
Dielectric Strength	ASTM D 257	kV/mm		54
Flames Spread Index	ASTM E162-2008			RP 50
Partial Discharge	IEC- 61730-2	VDC		>1500

Width: Up to 1000 mm - all sizes available. Sizes >1000 mm - make to order

PACKING: Unless specified, below is the standard packing of 'PRESERV'
 # Length / Roll : 100 metres | # No. of Rolls/Pallet : 9 or 12 |
 # Total Linear Metres/Pallet : 900 or 1200
 # Each roll is sealed in a protective bag in a corrugated box
 # Boxes are strapped on suitable pallets

Note : The above technical information represents the typical range of properties and is believed to be correct as on date. This data should however not be used to establish specification limits or used as basis for design. RenewSys gives no warranty and assumes no liability in connection with any use of this information and is subject to the RenewSys general terms and conditions.