


PRESERV E2 - WN

'PRESERV E2 - WN' is a Non-fluoro based UV and weather stable White insulation sheet. PRESERV E2 - 190 WN/125 WN can be used as electrical insulator in between Ribbons and Bus Bars in PV Module fabrication.

STRUCTURE

1. Proprietary Priming Layer
2. Adhesive
3. PET
4. Adhesive
5. Proprietary Priming Layer

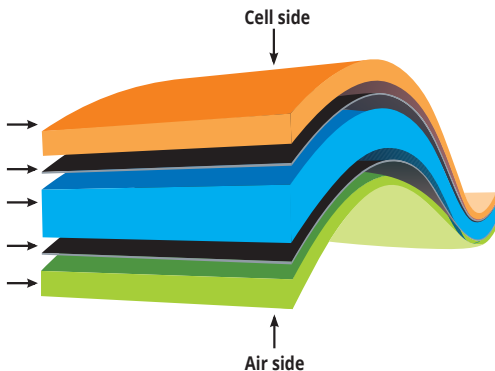

PROPERTIES - PRESERV E2 - WN

Particulars	Test Method	Unit	Description	190 WN	125 WN
Thickness	Micrometre	µm		410	340
Width	Scale	mm		Up to 1310	Up to 1310
Tensile Strength @ max load	ASTM D 882	MPa	MD TD	> 90 > 90	> 90 > 90
Elongation @ break	ASTM D 882	%	MD TD	> 90 > 90	> 90 > 90
Thermal Shrinkage @ 150° C, 30 min.	ASTM D 1204	%	MD TD	< 1.5 < 0.5	< 1.5 < 0.5
Interlayer Adhesion Strength	ASTM D 903	N/cm	PRIMER/PET PET/PRIMER	> 5 > 5	> 5 > 5
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	PRIMER / EVA	> 70	> 70

Width: Up to 1000 mm - all sizes available. Sizes >1000 mm - make to order

Packing Unless specified, below is the standard packing of 'PRESERV'

- # Length/Roll: 180 or 230 metres | # No. of Rolls/Pallet: 9
- # Total Linear Metres/Pallet: 1620 or 2070
- # Each roll is wrapped with polyethylene sheet
- # Rolls are palletize vertically placed with top and bottom lid

Note : The above technical information represents the typical range of properties and is believed to be correct as on date. However, this data should not be used to establish specification limits or used as basis for design. Lamination parameters and Quality of other components of the laminate during module manufacturing impact on the overall performance of the module, and hence we recommend the user to carry out intensive trials to test suitability of this product and module laminating conditions. RenewSys gives no warranty and assumes no liability on connection with any use of this information and is subject to the RenewSys general terms and conditions.



inter
solar
award

2018
Finalist

CONSERV®
E 360 - POE
Encapsulant

E2 - WN - 07/2021/1