


## **PRESERV A - WN1**

'PRESERV A - 125 WN1' is a Non - Fluoro based UV and weather stable white Backsheet, designed uniquely to have thermally integrated inseparable layers of PET along with a high bonding primer layer. This Backsheet has an improved resistance to scratch and delamination. PRESERV A - 125 WN1 can be used for all Crystalline PV Modules.

### **STRUCTURE**

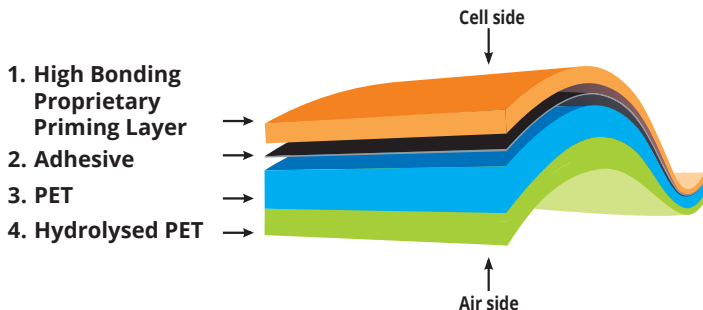

## **PROPERTIES - PRESERV A - 125 WN1**

Particulars	Test Method	Unit	Description	Values
Thickness	Micrometre	μm		300
Width	Scale	mm		Up to 1250
Tensile Strength @ max load	ASTM D 882	MPa	MD TD	≥ 90 ≥ 90
Elongation @ break	ASTM D 882	%	MD TD	≥ 90 ≥ 90
Thermal Shrinkage @ 150°C, 30 min.	ASTM D 1204	%	MD TD	≤ 1.5 ≤ 0.5
Interlayer Adhesion Strength	ASTM D 903	N/cm	PET/PRIMER	≥ 5
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	Backsheet / EVA	≥ 70
Moisture Barrier - MVTR @ 38°C, 90% RH	ASTM F 1249	g/(m <sup>2</sup> -day)		≤ 2.0
System Voltage	IEC 61730 - 1	VDC		≤ 1000
Comparative Tracking Index (CTI)	IEC 60112	V		600

Width: Up to 1000 mm - all sizes available. Sizes >1000 mm - make to order

- Packing Unless specified, below is the standard packing of 'PRESERV'
- # Length/Roll: 180 or 230 metres | # No. of Rolls/Pallet: 9
  - # Total Linear Metres/Pallet: 1620 or 2070
  - # Each roll is sealed in a protective bag
  - # Boxes are strapped on suitable pallets

Note : The above technical information represents the typical range of properties and is believed to be correct as on date. However, this data should not be used to establish specification limits or used as basis for design. Lamination parameters and Quality of other components of the laminate during module manufacturing impact on the overall performance of the module, and hence we recommend the user to carry out intensive trials to test suitability of this product and module laminating conditions. RenewSys gives no warranty and assumes no liability on connection with any use of this information and is subject to the RenewSys general terms and conditions.



**2018  
Finalist**

**CONSERV®  
E 360 - POE  
Encapsulant**

A - WN1 - 01/2021/1