


## PRESERV A - WNB

'PRESERV A - 225 WNB' is a Non - Fluoro based, UV and weather stable white Backsheet. It can be used for Cr - Si PV Modules rated for power up to 150 Wp.

### STRUCTURE

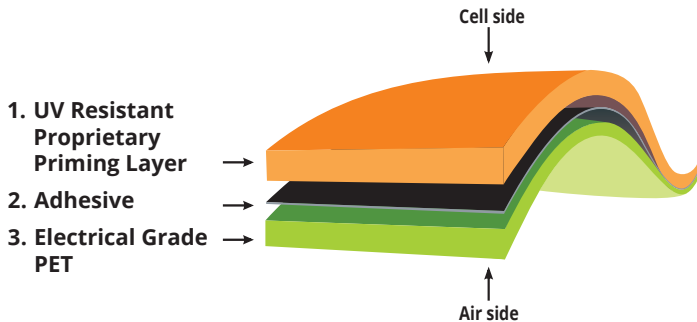

## PROPERTIES - PRESERV A - WNB

Particulars	Test Method	Unit	Description	Values
Thickness	Micrometre	µm		335
Width	Scale	mm		Up to 680
Tensile Strength @ max load	ASTM D 882	MPa	MD TD	≥90 ≥90
Elongation @ break	ASTM D 882	%	MD TD	≥90 ≥90
Thermal Shrinkage @ 150°C, 30 min.	ASTM D 1204	%	MD TD	<1.5 <0.5
Interlayer Adhesion Strength	ASTM D 903	N/cm	PET/PRIMER	>5
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	PRIMER/EVA	>70
Moisture Barrier - MVTR @ 38°C, 90% RH	ASTM F 1249	g/(m <sup>2</sup> - day)		<1.6
System Voltage	IEC 61730 - 1	VDC		≤1000

Width: Up to 1000 mm - all sizes available. Sizes >1000 mm - make to order

Packing Unless specified, below is the standard packing of 'PRESERV'

- # Length/Roll: 180 or 230 metres | # No. of Rolls/Pallet: 9
- # Total Linear Metres/Pallet: 1620 or 2070
- # Each roll is wrapped with polyethylene sheet
- # Rolls are palletize vertically placed with top and bottom lid

Note : The above technical information represents the typical range of properties and is believed to be correct as on date. However, this data should not be used to establish specification limits or used as basis for design. Lamination parameters and Quality of other components of the laminate during module manufacturing impact on the overall performance of the module, and hence we recommend the user to carry out intensive trials to test suitability of this product and module laminating conditions. RenewSys gives no warranty and assumes no liability on connection with any use of this information and is subject to the RenewSys general terms and conditions.



inter  
solar  
award

2018  
Finalist

CONSERV®  
E 360 - POE  
Encapsulant