


PRESERV A - WNB

'PRESERV A - WNB' is a Non - Fluoro based, UV and weather stable white Backsheet. It can be used for Cr - Si PV modules rated for power up to 150 Wp.

STRUCTURE

1. UV Resistant Proprietary Priming Layer
2. Adhesive
3. Electrical Grade PET

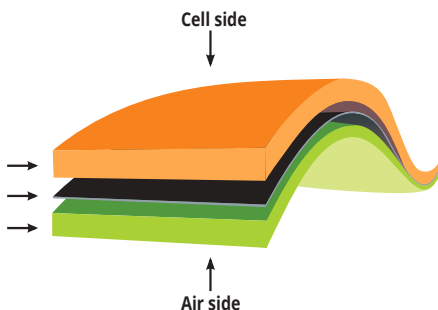

CONSERV[®]
E 360 - POE
Encapsulant

PROPERTIES

Particulars	Test Method	Unit	Description	Values
Thickness	Micrometre	µm		335
Width	Scale	mm		Up to 680
Tensile Strength @ max load	ASTM D 882	MPa	MD TD	≥90 ≥90
Elongation @ break	ASTM D 882	%	MD TD	≥90 ≥90
Thermal Shrinkage @ 150°C, 30 min.	ASTM D 1204	%	MD TD	<1.5 <0.5
Interlayer Adhesion Strength	ASTM D 903	N/cm	PET/PRIMER	>5
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	PRIMER/EVA	>70
Moisture Barrier - MVTR @ 38°C, 90% RH	ASTM F 1249	g/(m ² - day)		<1.6
System Voltage	IEC 61730 - 1	VDC		>1000

PACKING: Unless specified, below is the standard packing of 'PRESERV'
Length/Roll: 100 metres | # No. of Rolls/Pallet: 12 or 16 |
Total Linear Metres/Pallet: 1200 or 1600
Each roll is sealed in a protective bag
Boxes are strapped on suitable pallets

Note : The above technical information represents the typical range of properties and is believed to be correct as on date. This data should however not be used to establish specification limits or used as basis for design. RenewSys gives no warranty and assumes no liability in connection with any use of this information and is subject to the RenewSys general terms and conditions.